



MASON INDUSTRIES, Inc.


Manufacturers of Vibration Control Products
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____


HL
 Neoprene and
 Cotton Duck
 Pad

MATERIAL:

Neoprene and Cotton Duck Construction
 12 Plys per 1/2"(13mm) Thickness.

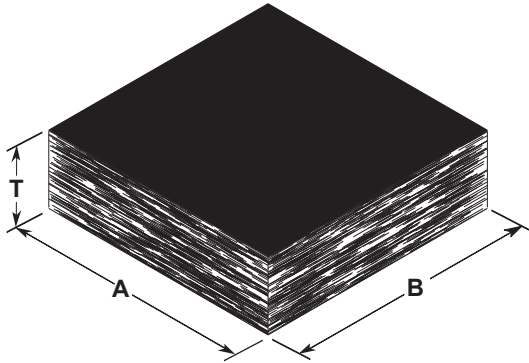

ACTUAL PAD SIZES ARE AS
 SCHEDULED BELOW

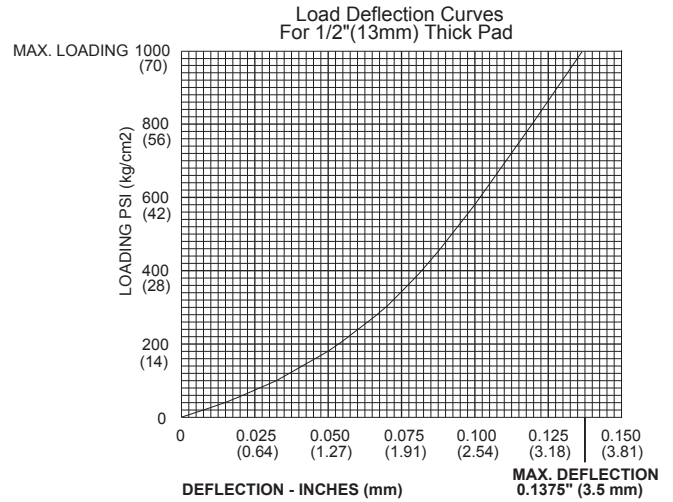

TYPE HL

Type	Thickness
HL-	1/4" 6mm
	3/8" 10mm
	1/2" 13mm
	5/8" 16mm
	3/4" 19mm
	7/8" 22mm
	1" 25mm

NOTES:

- ALLOWABLE LOADING DOES NOT VARY WITH PAD THICKNESS.
- DEFLECTIONS ARE DIRECTLY PROPORTIONAL TO PAD THICKNESS. THUS 1"(25mm) THICK PADS HAVE TWICE THE DEFLECTION AND 1/4"(6mm) PADS HALF THE DEFLECTION SHOWN ABOVE.

PLAN VIEW OF PAD LOCATIONS

TAG : _____

UNIT : _____



1 :	7 :
2 :	6 :
3 :	8 :
4 :	9 :
5 :	10 :
Sets Required:	

Type HL Dimensions (inch) (mm)

A	B	T