



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products


350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279
Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738
Info@MasonAnaheim.com

JOB NAME _____
CUSTOMER _____
CUSTOMER P.O. _____
MASON M.I. _____
DWG. NO. _____

RWHD

**Double
Deflection
LDS Hangers**

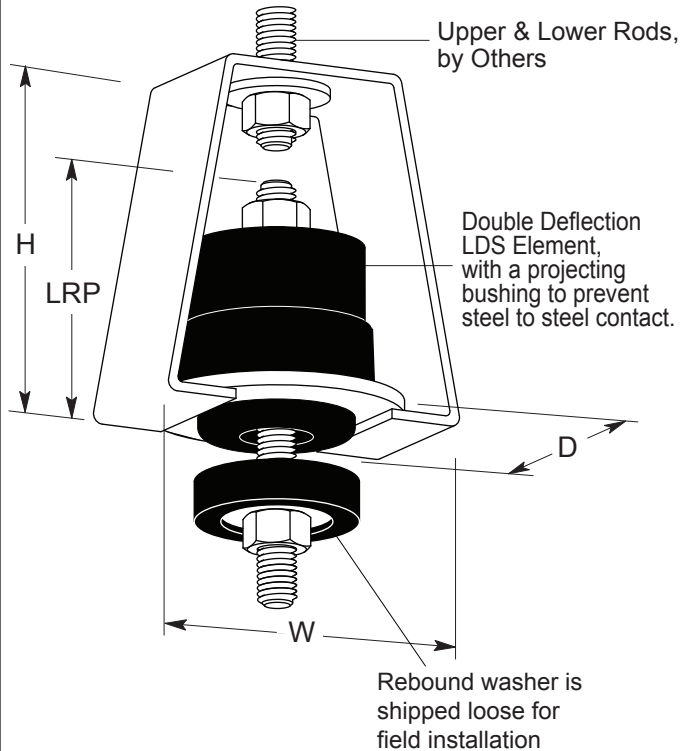

LDS stands for **Low Dynamic Stiffness Bridge Bearing**
Natural Rubber to minimize noise and vibration transmission.

TYPE RWHD RATINGS

Type and Size (Color Mark)	Durometer	Rated Capacity Range		Max. Rated Deflection	
		(lbs)	(kg)	(in)	(mm)
RWHD-Green	40	Up to 35	Up to 16	0.20	5
RWHD-White	60	35 - 75	16 - 34	0.20	5
RWHD-A-Black	30	Up to 45	Up to 20	0.35	9
RWHD-A-Green	40	30 - 75	14 - 34	0.35	9
RWHD-A-Red	50	60 - 125	27 - 57	0.35	9
RWHD-B-Red	50	Up to 235	Up to 107	0.40	10
RWHD-B-White	60	180 - 380	82 - 173	0.40	10
RWHD-B-Yellow	70	320 - 650	146 - 295	0.40	10
RWHD-BS-Blue	70	500 - 1000	227 - 455	0.40	10
RWHD-CS-Blue	70	1000 - 2100	455 - 955	0.40	10
RWHD-DS-Blue	70	2100 - 4200	955 - 1909	0.40	10

Hanger elements have straight line deflection curves.

LRP - Lower Rod Penetration
MRD - Maximum Rod Diameter

TYPE RWHD DIMENSIONS

Size	D		H		W		LRP		MRD	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
RWHD	13/4	45	21/4	57	17/8	48	11/4	32	3/8	10
RWHD-A	2	50	23/4	70	21/4	57	21/4	57	1/2	13
RWHD-B	31/4	83	41/2	114	41/4	108	3	76	3/4	19
RWHD-BS	31/4	83	41/2	114	41/4	108	3	76	3/4	19
RWHD-CS	31/4	83	5	127	41/4	108	31/4	83	7/8	22
RWHD-DS	4	100	61/4	159	43/4	121	31/4	83	7/8	22

CERTIFICATION DATA

TAG : _____

UNIT : _____

PLAN VIEW OF HANGER LOCATION :



SPECIFIED DEFLECTION

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :

Sets Required: