

MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279
Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738
Info@MasonAnaheim.com

www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____


ADA(H)

All Directional Anchors for Pipe Clamps or Guides

ADA

All Directional Anchors

Change designation to ADAH when base plate with bolt holes is required.

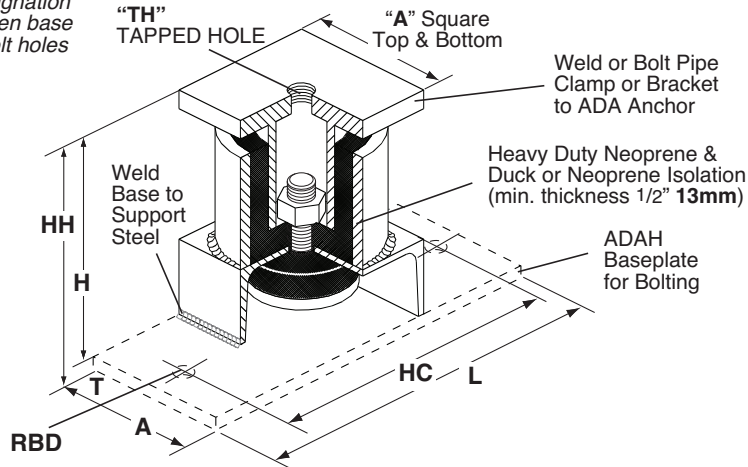

TYPE ADA and ADAH RATINGS

Type	Size	Anchoring Capacity per Pair (lbs) (kg)	Rated Defl (in) (mm)
ADA-	75	1,000 453	0.1 2.5
	200	6,000 2722	0.1 2.5
	350	24,000 10886	0.1 2.5
ADAH-	600	60,000 27216	0.1 2.5
	800	100,000 45359	0.1 2.5

Each pair of ADA(H) all directional anchors provides high frequency noise and vibration isolation for those locations where movement must be controlled.



When the anchors are attached to piping as shown in the illustrations below, all expansion will be directed from this point.

Anchors are always used in pairs.

TYPE ADA and ADAH DIMENSIONS (inches and mm)

RBD-Required Bolt Dia.
for Max. Loading

Type	Size	A	H	L	T	HC	HH	RBD	TH
ADA-	75	3	41/2	6	1/4	5	43/4	3/8	1/2-13UNC
		76	114	152	6	127	121	10	
	200	4	7	11	3/8	81/2	73/8	5/8	5/8-11UNC
ADAH-		102	178	279	10	216	187	16	
	350	*	71/4	12	1/2	91/2	73/4	3/4	None
			184	305	13	241	197	19	
	600	9	11	141/2	3/4	12	113/4	11/4	None
		229	279	368	19	305	298	32	
	800	11	131/2	171/2	1	141/2	141/2	11/2	None
		279	343	445	25	368	368	38	



*Size 350 –
Top is 5" **127mm** x 5" **127mm**, Bottom is 6" **152mm** x 6" **152mm**.

CERTIFICATION DATA

[illegible]