



# MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products


350 Rabro Drive  
Hauppauge, NY 11788  
631/348-0282  
FAX 631/348-0279  
Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D  
Anaheim, CA 92801  
714/535-2727  
FAX 714/535-5738  
Info@MasonAnaheim.com

JOB NAME \_\_\_\_\_  
CUSTOMER \_\_\_\_\_  
CUSTOMER P.O. \_\_\_\_\_  
MASON M.I. \_\_\_\_\_  
DWG. NO. \_\_\_\_\_

# SPS

**SPOOL TYPE  
ACOUSTICAL  
PIPE SEALS**

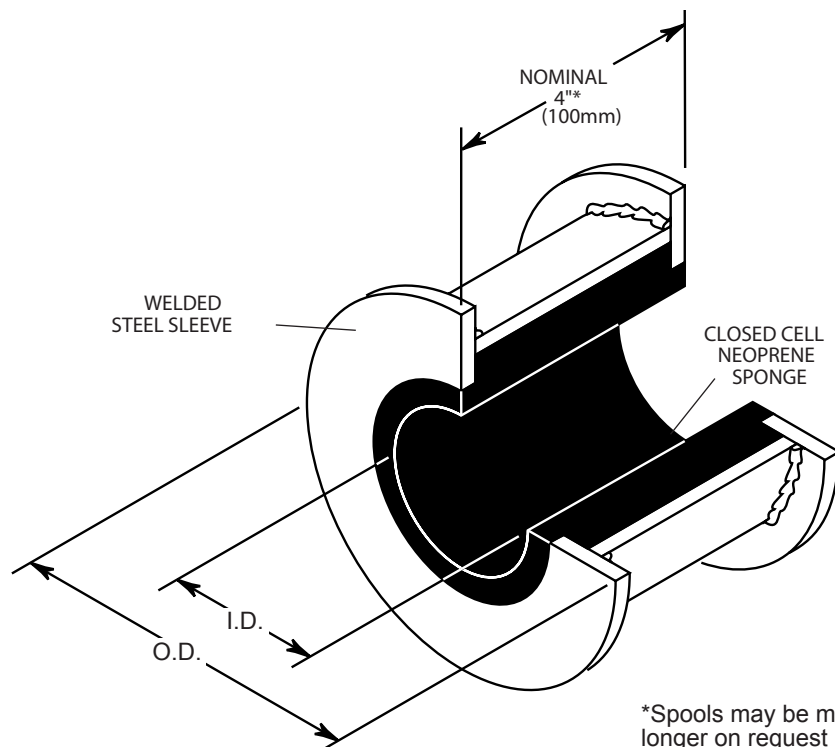

\*Spools may be made longer on request

## TYPE SPS DIMENSIONS

Spool Piece For Pipe Size in (mm)	I.D. in (mm)	O.D. in (mm)
1/2 (13)	7/8 (22)	4 (102)
3/4 (19)	1 1/16 (27)	4 (102)
1 (25)	1 3/8 (35)	4 3/4 (121)
1 1/4 (32)	1 11/16 (43)	5 (127)
1 1/2 (38)	1 7/8 (48)	5 1/4 (133)
2 (51)	2 3/8 (60)	5 1/2 (140)
2 1/2 (64)	2 7/8 (73)	6 1/2 (165)
3 (76)	3 1/2 (89)	7 3/4 (197)
3 1/2 (89)	4 (102)	7 3/4 (197)
4 (102)	4 1/2 (114)	7 3/4 (197)
5 (127)	5 9/16 (141)	9 3/4 (248)
6 (152)	6 5/8 (168)	9 3/4 (248)
8 (203)	8 5/8 (219)	11 3/4 (298)
10 (254)	10 3/4 (273)	15 (381)
12 (305)	12 3/4 (324)	17 (432)

## INSTALLATION PROCEDURE

If pipe is to be installed before wall construction:

1. Slide SPS onto pipe.
2. Hang pipe.
3. Build or pour wall around SPS, caulk any cracks.

If pipe is to be installed in hole in wall:

1. Slide SPS onto pipe.
2. Pass pipe thru hole and position SPS in hole.
3. Pack concrete around SPS and caulk any cracks.

If pipe is to be installed thru SPS cast into wall:

1. Cast SPS into wall as wall is being built.
2. Slide pipe thru SPS.
3. Caulk any cracks.

## CERTIFICATION DATA