

MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279
Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738
Info@MasonAnaheim.com

www.Mason-Ind.com

JOB NAME _____

CUSTOMER _____


CUSTOMER P.O. _____

MASON M.I. _____

DWG. NO. _____

SWS

Split Acoustical Wall Seals for Pipe

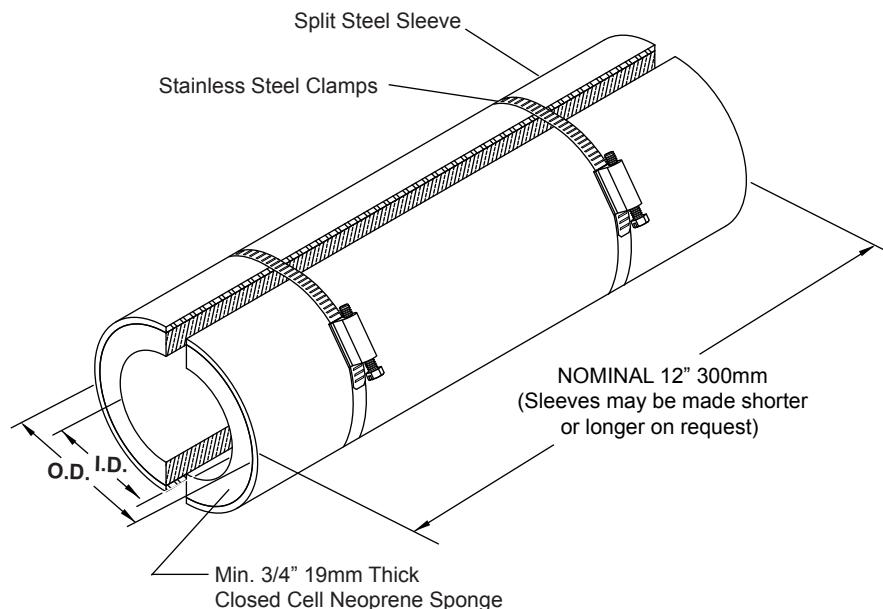

INSTALLATION PROCEDURE

If pipe is to be installed before wall construction:

1. Clamp SWS onto pipe.
2. Build or pour wall around SWS.
3. Pack concrete around SWS and caulk any cracks.

If pipe is to be installed in hole in wall:

1. Pass Pipe through opening.
2. Clamp SWS in place.
3. Pack concrete around SWS and caulk any cracks.

TYPE SWS DIMENSIONS

Wall Seal Pipe Size (in) (mm)		Installed I.D. (in) (mm)		Outer Shell Max O.D.* (in) (mm)	
3/4	19	1.05	27	3.50	89
1	25	1.38	35	4.00	100
1 1/4	32	1.67	42	4.00	100
1 1/2	38	1.90	48	4.50	115
2	50	2.38	60	4.50	115
2 1/2	65	2.87	73	5.63	143
3	75	3.50	90	6.63	168
3 1/2	90	4.00	100	6.63	168
4	100	4.50	115	6.63	168
5	125	5.56	141	8.63	219
6	150	6.62	168	8.63	219
8	200	8.62	219	10.75	273
10	250	10.75	273	13.00	330
12	300	12.75	324	15.00	381
14	350	14.00	356	17.00	432
16	400	16.00	406	19.00	483
18	450	18.00	457	21.00	533

* O.D. may be reduced depending on material availability.

[illegible]