



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D
Hauppauge, NY 11788 Anaheim, CA 92801
631/348-0282 714/535-2727
FAX 631/348-0279 FAX 714/535-5738
Info@Mason-Ind.com Info@MasonAnaheim.com
www.Mason-Ind.com


JOB NAME _____
CUSTOMER _____
CUSTOMER P.O. _____
MASON M.I. _____
DWG. NO. _____

JAH


JOIST
ATTACHMENT
HARDWARE

The JAH is used to attach solid or cable braces to the top cord of bar joists. Attachment to the lower cord is not recommended.


"E" TAPPED HOLE IN DUCTILE IRON CASTING. BOLT BY OTHERS.

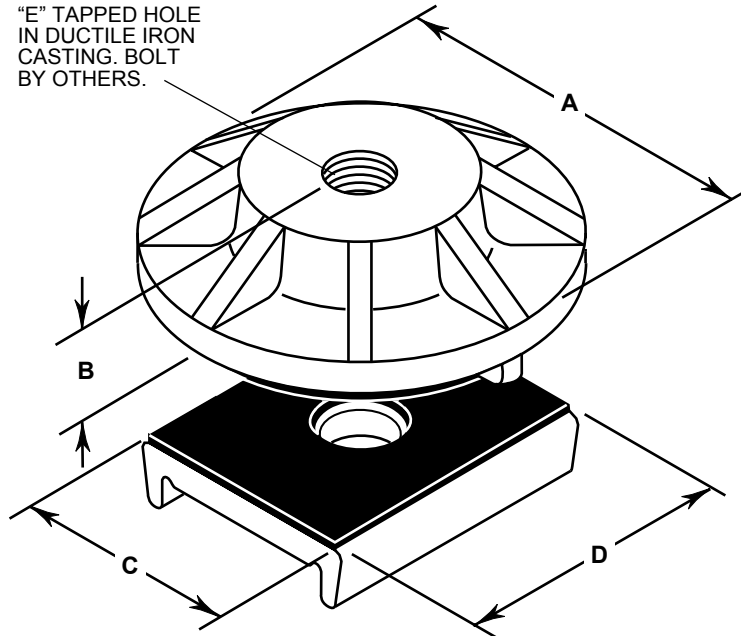

SCB ATTACHED TO TOP OF JOIST WITH JAH

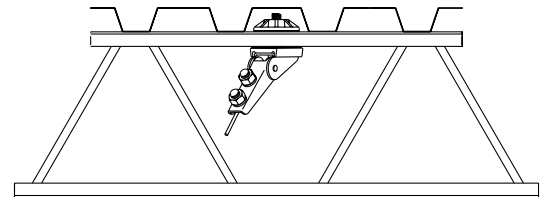

BOLT LENGTH IS
ANGLE LEG LENGTH
PLUS 1 1/2" (40mm)
MINIMUM

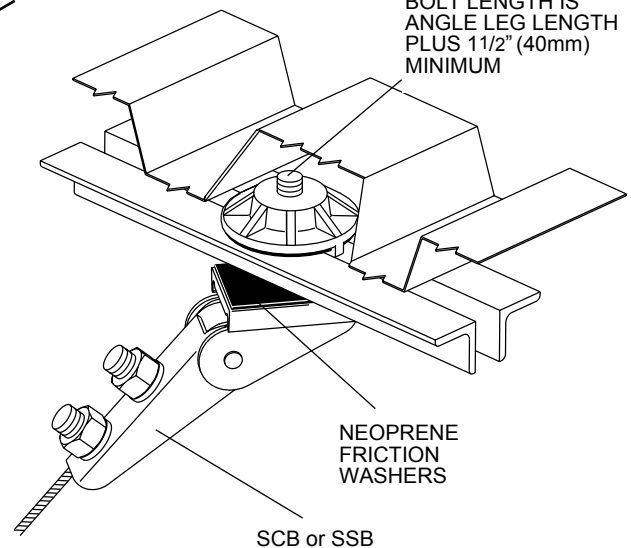

SCB or SSB

TYPE JAH DIMENSIONS (inches mm)

Size	SCB/SSB Size	A	B	C	D	E	Max. Load			
							SCB		SSB	
JAH-0	SCB-0	3 76	3/4 19	1 7/8 48	1 3/4 44	3/8 -16UNC	500	227	-	-
JAH-1	SCB/SSB-1	3 76	3/4 19	1 7/8 48	2 1/4 57	1/2 -13UNC	975	442	1500	680
JAH-2	SCB/SSB-2	3 76	3/4 19	2 1/8 54	3 76	5/8 -11UNC	2050	930	3000	1361
JAH-3	SCB/SSB-3	3 76	3/4 19	2 1/2 64	3 3/4 95	3/4 -10UNC	3150	1429	5000	2268

SIZE	QTY.	TAG