

MASON INDUSTRIES, Inc. Manufacturers of Vibration Control Products


350 Rabro Drive Hauppauge, NY 11788 631/348-0282 FAX 631/348-0279 Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D Anaheim, CA 92801 714/535-2727 FAX 714/535-5738 Info@MasonAnaheim.com www.Mason-Ind.com

JOB NAME
CUSTOMER
CUSTOMER P.O.
MASON M.I.
DWG. NO.

Seismic Cable **Brace Anchor** & Assembly

The SCBV can be used with either an SCB or SCBH on the other end. Clamping to beam flanges eliminates drilling or welding and generally presents a cost savings.

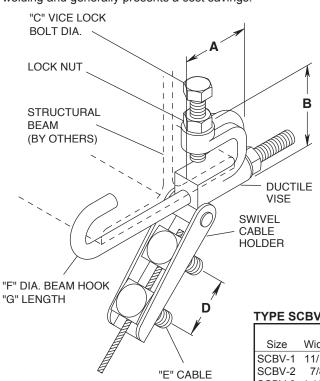

TYPE SCBV ASSEMBLY RATING AS CONTROLLED BY CABLE BREAK STRENGTH

	Cable	Diameter		HPD Ratings
Size	(in)	(mm)	(lbs)	(kg)
SCBV-1	1/8	3	975	442
SCBV-2	3/16	5	2050	930
SCBV-3	1/4	6	3150	1429

Ratings are from test data and calculations used to obtain California OSHPD Preapproval Number OPA-0349

Testing was supervised and certified by an independant engineer registered in the state of california.

Ratings are based on attachment to steel.

Preferred installation ange is 45° Maximum variation ±15°.

NOTE: Not to be used as a vertical hanger for equipment, duct work or piping. To be used as a seismic restraint only.

TYPE SCBV ANCHOR DIMENSIONS (inches)

-1												Beam Flange
-	Size	Width	Clearance	Depth	Α	В	С	D	Ε	F	G	Width Range
	SCBV-1	11/16	13/16	1 5/16	1 7/8	2 3/8	7/16	1 1/2	1/2	3/8	10	3 1/2- 8 1/2
	SCBV-2	7/8	1 1/16	1 1/16	2 7/8	3	1/2	1 3/4	5/8	3/8	12	3 1/2- 10
	SCBV-3	1 1/16	1 1/8	1 15/16	3 3/8	3 3/4	5/8	2	3/4	1/2	12	4-9 1/2

RETENTION BOLT DIA.

APPROVED California Office of Statewide **Health Planning and Development**

FIXED EQUIPMENT ANCHORAGE OPA-0349 AUGUST 5, 2002



TYPE SCBV ANCHOR DIMENSIONS (mm)

1											Beam Flange
Size	Width	Clearance	Depth	Α	В	С	D	Е	F	G	Width Range
SCBV-1	17	21	33	48	60	7/16	38	1/2	3/8	254	89-216
SCBV-2	22	27	27	73	76	1/2	44	5/8	3/8	305	89-254
SCBV-3	27	29	49	86	95	5/8	51	3/4	1/2	305	102-241

TORQUE VALUES

Diameter	Torque Fo	ot Pounds	Torque Kilogram-Meters				
Diameter	Minumum	Maximum	Minimum	Maximum			
1/2"	25	29	3.5	4.1			
5/8" 3/4"	45 55	52 64	6.3 7.7	7.3 9.0			

	TYPE	QTY.		TAG	
Certification Form S	S-107 04/2009 DW	/N:	CHKD:	DATE:	DWG. No.

ertification Form S-107 04/2009