



## MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive  
Hauppauge, NY 11788  
631/348-0282  
FAX 631/348-0279

2101 W. Crescent Ave., Suite D  
Anaheim, CA 92801  
714/535-2727  
FAX 714/535-5738

Info@Mason-Ind.com • www.Mason-Ind.com

In 1976 the acoustical community asked us to develop a floating floor mounting that would last as long as the building and provide response frequencies lower than two inch (50mm) thick fiberglass.

We were pleased to find that Neoprene molded in exact accordance with DuPont formulations had addressed the life expectancy requirement as bridge supports. Outdoor applications are far more severe than within a building because of the temperature extremes, sunlight, rain, snow and ice.

We continued with Neoprene until 2006 when we developed Natural Rubber Compounds with the same life expectancy but much lower dynamic stiffness. These compounds are referred to as LDS. Frequencies in 2 inch (50mm) thickness are now 7 – 8 Hz compared to fiberglass @ 15 Hz. It is hard to understand why fiberglass is still acceptable. Please refer to Bulletin ACS-102-3, page 6 for a complete discussion.

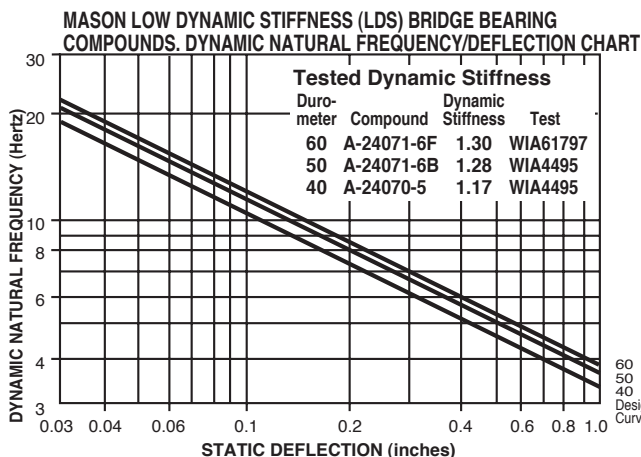
In bridge and overpass work there is a need for very high loadings with pressures as high as 2000 lbs/square inch. If strain is limited to 10 to 15 percent of the pad thickness, both creep and permanent set are very acceptable.

Since we started by supporting floating floor areas of 1 square foot (0.1 square meters), our initial problem was to design a stable rubber column that would deflect 0.2 to 0.3 inches (5mm to 8mm) under minor loadings. A mounting thickness of 2 inches (50mm) at 10 to 15% deflection (strain) met the deflection criteria. A 2 inch (50mm) diameter reduced the shape factor (SF= Loaded Area/Perimeter Area) to achieve the low capacities of the EAFM-8823 on page 3.

All of the other sizes were gradually designed and tooled to raise or lower both capacities and frequencies.

In response to the wishes and specifications of Acousticians and Architects we almost always manufacture these products in Bridge Bearing Natural Rubber and tool for other sizes and thicknesses. We still supply Neoprene but only on special order.

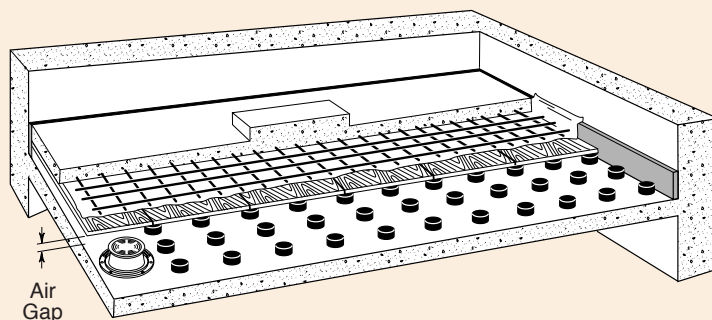
This arsenal of available sizes encouraged other applications. Standard designs and variations are used as drop hammer shock absorbers, subway and railroad isolators as required. We design and fabricate to virtually all requirements, including squares and rectangles with bonded embedded plates to increase shape factors and capacities, in our own factory.



## ELASTOMERIC ACOUSTICAL FLOOR MOUNTINGS for FLOATING FLOORS and OTHER SUITABLE APPLICATIONS

# EAFM

EAFM-114-3 BULLETIN





### Typical EAFM Floating Floor

#### AASHTO BRIDGE BEARING SPECIFICATIONS FOR POLYISOPRENE

ORIGINAL PHYSICAL PROPERTIES			TESTED FOR AGING			COMPRES-	LONG
			OVEN AGING(70hrs/158°F)		OZONE	SION SET	TERM
Tests: ASTM D-2240 & D-412			ASTM D-573		ASTM D-1149	ASTM D-395	ISO8013
Duro-meter	Tensile Strength	Elongat. at Break	Hard-ness	Tensile Strength	Elongat. at Break	25 pphm in air by Vol. 20% Strain 100°F	
Shore A	(min)	(min)	(max)	(max)	(max)	22hrs/158°F Method B	168hrs
40±5*	2000 psi	500%	+10%	-25%	-25%	No Cracks	25%(max)
50±5	2250 psi	450%	+10%	-25%	-25%	No Cracks	25%(max)
60±5	2250 psi	400%	+10%	-25%	-25%	No Cracks	25%(max)
70±5	2250 psi	300%	+10%	-25%	-25%	No Cracks	25%(max)

\*AASHTO does not spec 40 Duro. 40 Duro by Mason.

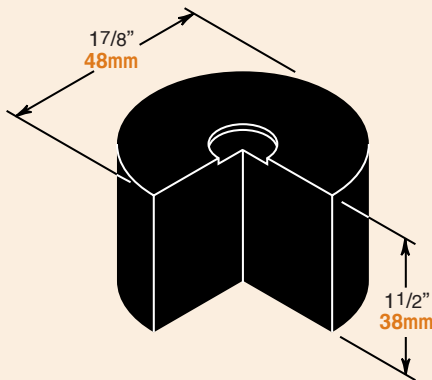
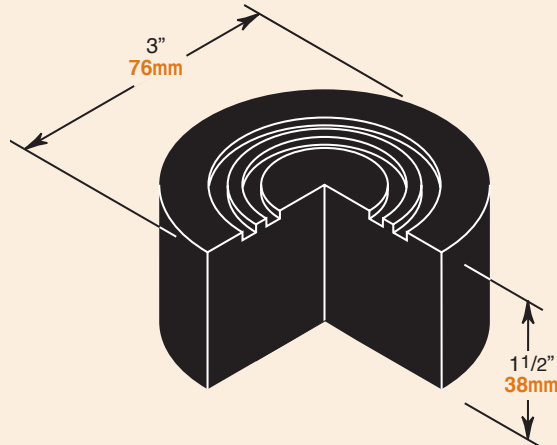
## 1/2" – 1" 13 – 25mm Height


**EAFM 16114**

**EAFM 6534**

EAFM Designation & Color  Durometer ±5			0.025" 0.6mm Deflection			0.050" 1.3mm Deflection			0.075" 1.9mm Deflection			Temporary Overload* 3X Maximum Loading lbs. kgs.	
			Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz			
16114	Green	40	17	8	21.4	33	15	15.1	50	23	12.4	150	68
	Red	50	25	11	22.4	50	23	17.8	75	34	12.9	225	102
	White	60	37	17	22.5	73	33	16.0	110	50	13.0	330	150
			0.05" 1.3mm Deflection			0.1" 2.5mm Deflection			0.15" 3.8mm Deflection			lbs. kgs.	
			Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz			
6534	Black	30	17	8	14.7	33	15	10.4	50	23	8.5	150	68
	Green	40	30	14	15.1	60	27	10.7	90	41	8.7	270	122
	Red	50	47	21	15.8	93	42	11.2	140	64	9.1	420	191
	White	60	70	32	16.0	140	64	11.3	210	95	9.2	630	286

\*Temporary overload is often mentioned in specifications. We have tested mountings compressed to 50% of their initial thickness. After release there was no permanent set or damage.

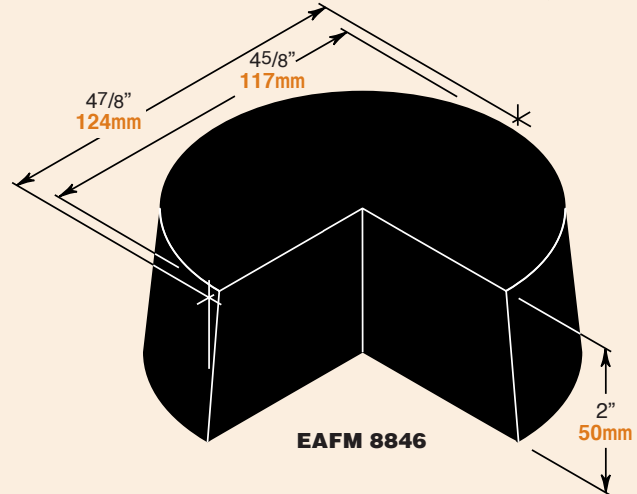
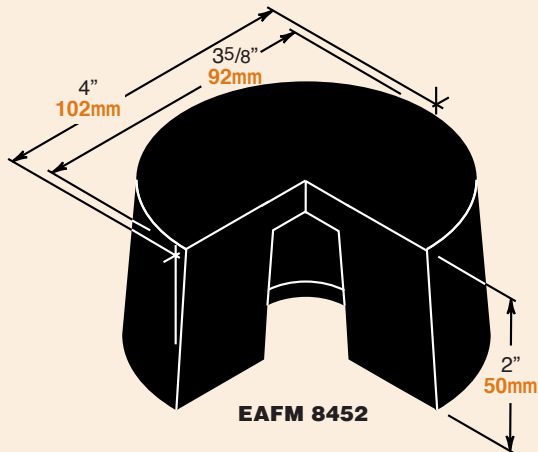
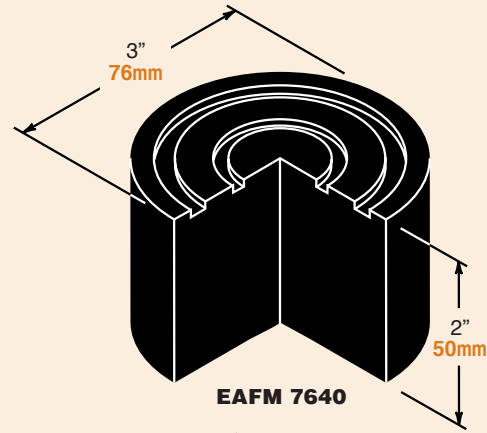

## 1 1/2" 38mm Height


**EAFM 8852**

**EAFM 7432**

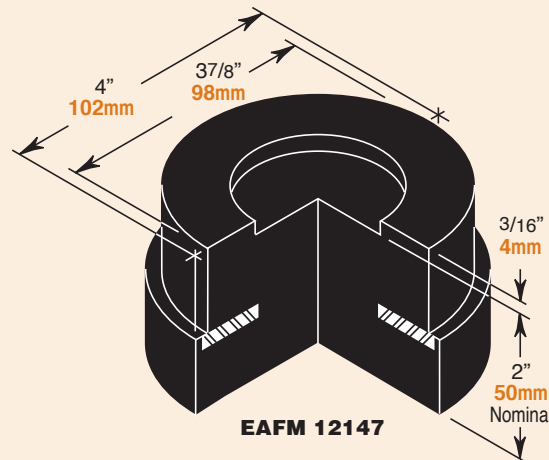
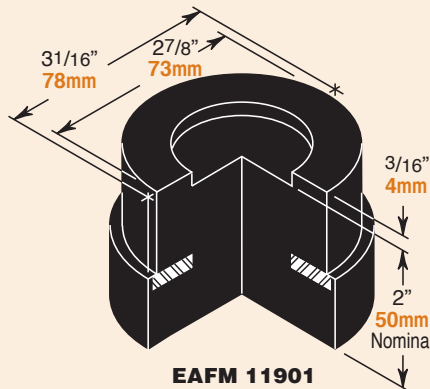
EAFM Designation & Color  Durometer ±5			0.075" 1.9mm Deflection			0.150" 3.8mm Deflection			0.225" 5.7mm Deflection			Temporary Overload* 3X Maximum Loading lbs. kgs.	
			Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz		Loading lbs.	Frequency kgs. Hz			
8852	Green	40	50	23	12.4	100	45	8.7	150	68	7.1	450	205
	Red	50	73	33	12.9	145	66	9.1	220	100	7.5	660	300
	White	60	113	51	13.0	225	102	9.2	340	155	7.6	1020	465
7432	Green	40	93	42	12.4	185	84	8.7	280	127	7.1	840	380
	Red	50	139	63	12.9	277	126	9.1	420	191	7.5	1260	570
	White	60	208	95	13.0	416	189	9.2	630	286	7.6	1890	860

\*Temporary overload is often mentioned in specifications. We have tested mountings compressed to 50% of their initial thickness. After release there was no permanent set or damage.

## 2" 50mm Height

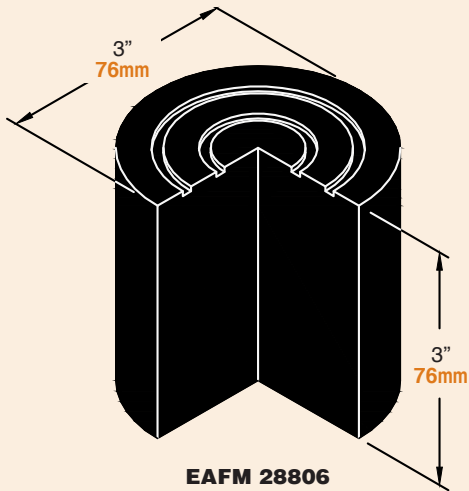
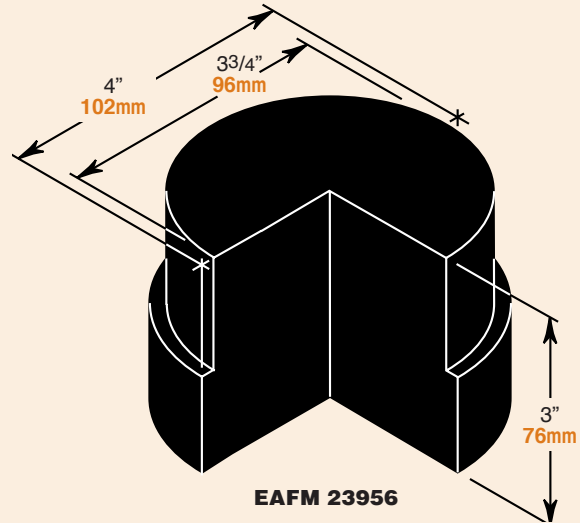
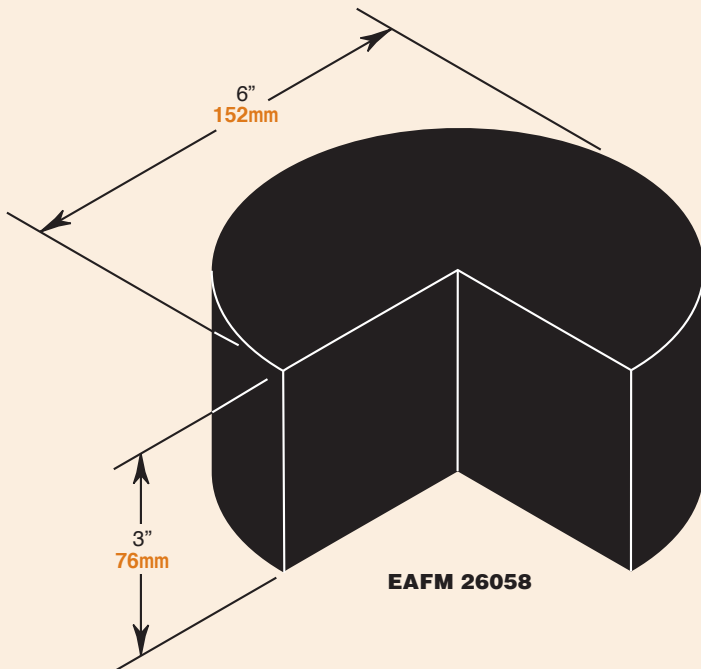
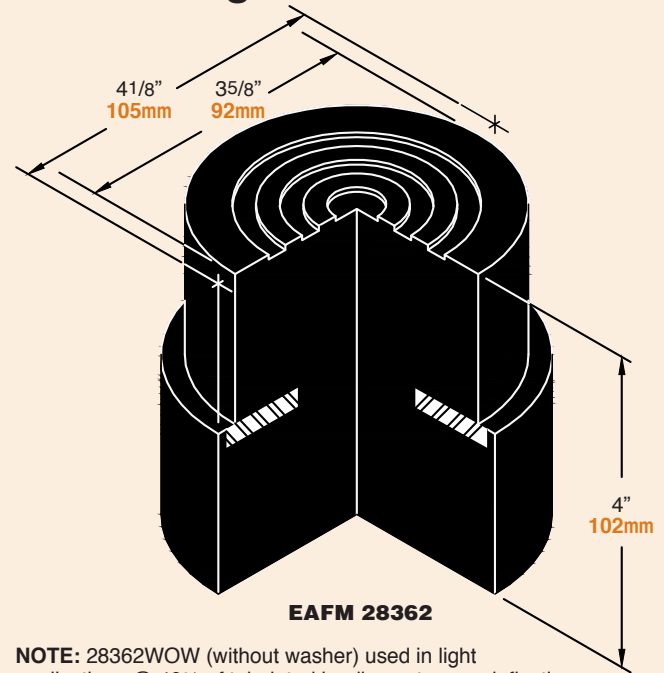


## 2" 50mm Nominal Height



EAFM Designation & Color			Durometer ±5	0.1" 2.5mm Deflection			0.2" 5.1mm Deflection			0.3" 7.6mm Deflection			Temporary Overload* 3X Maximum Loading	
				Loading		Frequency Hz	Loading		Frequency Hz	Loading		Frequency Hz		
				lbs.	kgs.		lbs.	kgs.		lbs.	kgs.		lbs.	kgs.
8823	Green	40	48	22	10.7	97	44	7.6	145	66	6.2	435	197	
	Red	50	80	36	11.2	160	73	7.9	240	109	6.4	720	327	
	White	60	120	54	11.3	240	109	8.0	360	163	6.5	1080	490	
7640	Green	40	140	64	10.7	280	127	7.6	420	191	6.2	1260	572	
	Red	50	200	92	11.2	400	181	7.9	600	272	6.4	1800	816	
	White	60	300	136	11.3	600	273	8.0	900	409	6.5	2700	1225	
8452	Green	40	167	76	10.7	333	151	7.6	500	227	6.2	1500	681	
	Red	50	256	116	11.2	513	233	7.9	770	350	6.4	2310	1050	
	White	60	400	182	11.3	800	364	8.0	1200	545	6.5	3600	1636	
8846	Red	50	600	273	11.2	1200	545	7.9	1800	818	6.4	5400	2454	
	White	60	900	409	11.3	1800	817	8.0	2700	1227	6.5	8100	3681	
11901	Red	50	368	167	11.2	735	333	7.9	1100	499	6.4	3300	1497	
	White	60	520	236	11.3	1040	472	8.0	1550	703	6.5	4650	2109	
12147	Red	50	667	303	11.2	1335	606	7.9	2000	907	6.4	6000	2722	
	White	60	1075	488	11.3	2150	975	8.0	3200	1451	6.5	9600	4354	

\*Temporary overload is often mentioned in specifications. We have tested mountings compressed to 50% of their initial thickness. After release there was no permanent set or damage.

**3" 76mm Height**

**3" 76mm Height**

**3" 76mm Height**

**4" 100mm Height**


NOTE: 28362WOW (without washer) used in light applications @ 40% of tabulated loadings at same deflection.

EAFM Designation & Color			Durometer ±5	0.15" 3.8mm Deflection			0.3" 7.6mm Deflection			0.45" 11.4mm Deflection			Temporary Overload* 3X Maximum Loading	
				Loading		Frequency	Loading		Frequency	Loading		Frequency		
				lbs.	kgs.	Hz	lbs.	kgs.	Hz	lbs.	kgs.	Hz	lbs.	kgs.
28806	Green	40	75	34	8.7	150	68	6.2	225	102	5.0	675	306	
	Red	50	125	56	9.1	250	113	6.4	375	170	5.2	1125	510	
	White	60	200	90	9.2	400	181	6.5	600	272	5.3	1800	816	
23956	Green	40	230	105	8.7	460	210	6.2	700	320	5.0	2100	960	
	Red	50	365	166	9.1	730	332	6.4	1100	500	5.2	3300	1500	
	White	60	500	227	9.2	1000	454	6.5	1500	680	5.3	4500	2040	
26058	Green	40	270	125	8.7	540	250	6.2	810	375	5.0	2430	1125	
	Red	50	750	340	9.1	1500	680	6.4	2250	1020	5.2	6750	3060	
	White	60	950	430	9.2	1900	860	6.5	2850	1290	5.3	8560	3870	
			0.20" 5.1mm Deflection			0.40" 10.2mm Deflection			0.60" 15.2mm Deflection					
			Loading		Frequency	Loading		Frequency	Loading		Frequency			
			lbs.	kgs.	Hz	lbs.	kgs.	Hz	lbs.	kgs.	Hz	lbs.	kgs.	
28362	Green	40	160	73	7.0	435	197	5.0	660	299	4.2	1880	853	
	Red	50	370	168	8.0	725	329	5.5	1100	499	4.6	3300	1497	
	White	60	450	204	8.5	1200	544	6.0	1830	830	5.0	5498	2492	

\*Temporary overload is often mentioned in specifications. We have tested mountings compressed to 50% of their initial thickness. After release there was no permanent set or damage.