



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279


2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738

Info@Mason-Ind.com • www.Mason-Ind.com

JOB NAME _____
CUSTOMER _____
CUSTOMER P.O. _____
MASON M. _____
DWG No. _____

SLRSOW

2" (51mm) Deflection
B, B2 & C2
Series Spring
Mounts

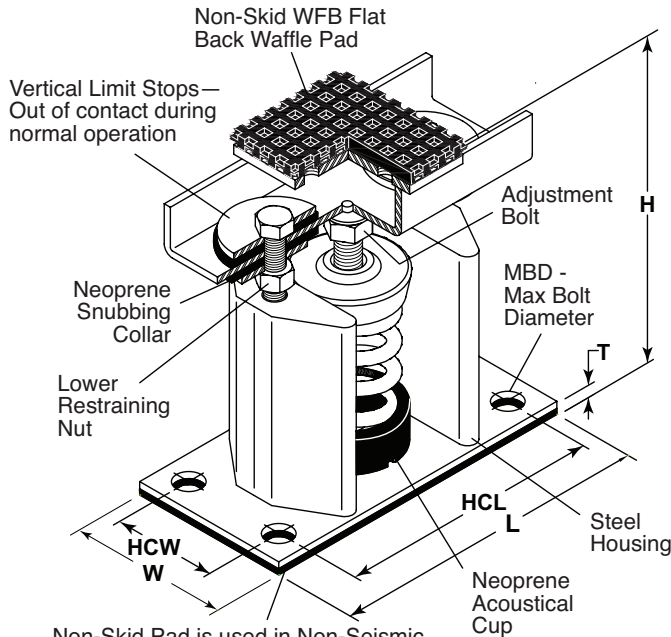

Non-Skid Pad is used in Non-Seismic Zones only. Remove pad prior to installing in seismic zones. Reduce published height by 1/8" if pad is removed.

SLRSOW-B
(1 B spring)
SLRSOW-B2
(1 B2 spring)
SLRSOW-C2
(1 C2 spring)

All springs without "†" have an additional travel to solid equal to 50% of the rated deflection.

TYPE SLRSOW DIMENSIONS (inches and mm)

Type & Size	H	T	L	HCL	W	HCW	MBD
SLRSOW-B	9 229	3/8 10	81/2 216	7 178	41/4 108	23/4 70	5/8 16
SLRSOW-B2	9 229	3/8 10	81/2 216	7 178	41/4 108	23/4 70	5/8 16
SLRSOW-C2	9 229	3/8 10	91/2 241	71/2 191	51/4 133	31/2 89	5/8 16

TYPE SLRSOW RATINGS 2" 51mm Deflection Series

SLRSOW Size	Rated Capacity (lb) (kg)		Rated Defl (in) (mm)		Mount Constant (lb/in)(kg/mm)	Spring Color
B-20	20	9	2.40	61	8 0.15	Tan
B-26	26	12	2.18	55	12 0.22	Wht/Blue
B-35	35	16	2.20	56	16 0.29	Purple
B-50	50	23	2.20	56	24 0.41	Wht/Red
B-65	65	29	2.10	53	31 0.55	Brown
B-85	85	39	2.10	53	40 0.74	Wht/Blk
B-115	115	52	2.00	51	57 1.02	Silver
B-150	150	68	2.00	51	75 1.33	Orange
B2-210	210	95	2.12	54	99 1.76	Silver
B2-290	290	132	2.00	51	144 2.59	Blue
B2-450†	450	204	2.00	51	224 4.00	Tan
B2-680†	680	308	2.00	51	340 6.04	Gray
C2-125	125	57	2.50	64	50 0.89	Purple
C2-170	170	77	2.40	61	70 1.26	Brown
C2-210	210	95	2.30	58	90 1.64	Red
C2-260	260	118	2.20	56	120 2.11	White
C2-330	330	150	2.00	51	165 2.94	Black
C2-460	460	209	2.00	51	230 4.10	Blue
C2-610	610	277	2.00	51	305 5.43	Green
C2-880†	880	399	2.00	51	440 7.82	Gray
C2-1210†	1210	549	2.00	51	605 10.8	Silver
C2-1540†	1540	699	2.00	51	770 13.7	Gray*
C2-1870†	1870	848	2.00	51	935 16.6	Silver*

*with Red inner spring

†Published ratings allow minimum 25% additional travel to solid. For a full 50% specified minimum use the following ratings:

50% Travel to Solid				50% Travel to Solid			
Capacity		Defl.		Capacity		Defl.	
Size	(lbs) (kg)	(in) (mm)		Size	(lbs) (kg)	(in) (mm)	
B2-450	410 186	1.83 46		C2-1210	1010 458	1.67 42	
B2-680	565 256	1.67 42		C2-1540	1285 583	1.67 42	
C2-880	800 363	1.82 46		C2-1870	1560 708	1.67 42	

SPRING DATA (inches and mm)

Spring Size	OD	Free Height	Ratio Kx/Ky	Ratio OD/OH
B	23/8 60	4 102	0.55-0.65	0.95-1.00
B2	23/8 60	41/2 114	0.80-0.90	1.19-1.48
C2	27/8 73	5 127	0.63-0.85	0.96-1.15

Solid Spring Height = Free Height minus 1.5 times the Rated Deflection.

PLAN VIEW OF MOUNT LOCATIONS

TAG: _____

UNIT: _____



SPECIFIED DEFLECTION

1:	6:
2:	7:
3:	8:
4:	9:
5:	10:
Sets Required:	