

**MASON INDUSTRIES, Inc.**

Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D
Hauppauge, NY 11788 Anaheim, CA 92801
631/348-0282 714/535-2727
FAX 631/348-0279 FAX 714/535-5738
Info@Mason-Ind.com Info@MasonAnaheim.com
www.Mason-Ind.com

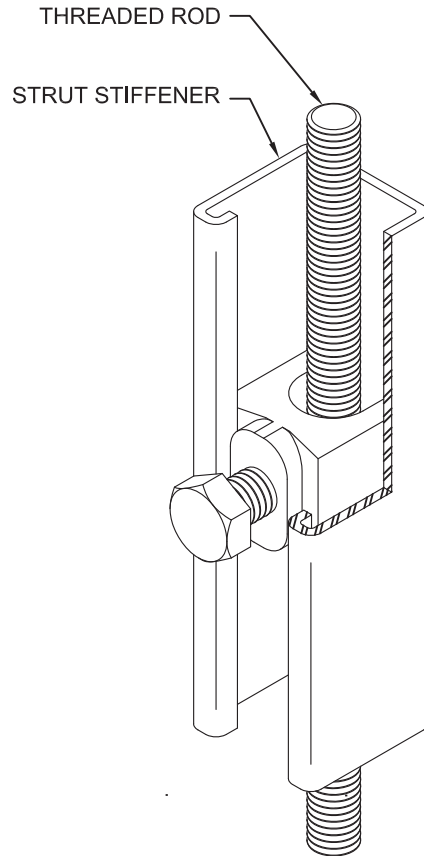
JOB NAME _____

CUSTOMER _____

CUSTOMER P.O. _____

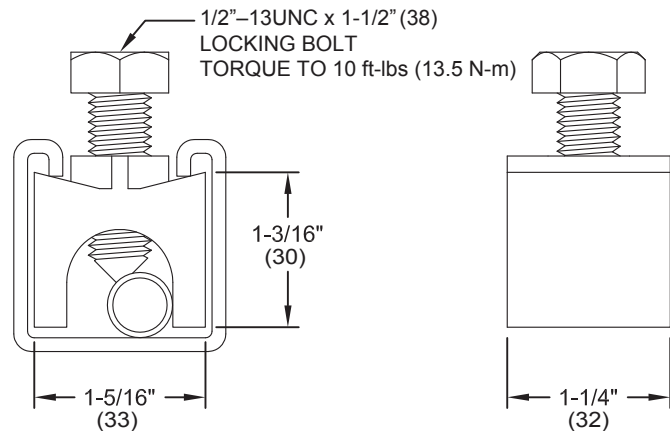
MASON M.I. _____

DWG. NO. _____

UCC**SEISMIC ROD
CLAMPS FOR
STRUT
CHANNELS**

TYPE UCC WITH STEEL STRUT ASSEMBLY RATINGS

Rod Size in (mm)	Maximum Compressive Force lbs (kN)	Strut Stiffener		Maximum UCC Spacing in (mm)
		Minimum Size in (mm)	Max Length in (mm)	
3/8 (10)	425 (1.9)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	96 (2438)	22 (559)
1/2 (13)	1275 (5.6)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	96 (2438)	31 (787)
	1200 (5.3)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	120 (3048)	31 (787)
5/8 (16)	1475 (6.5)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	96 (2438)	39 (991)
	1325 (5.9)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	120 (3048)	39 (991)
3/4 (19)	2500 (11.1)	1 5/8 x 1 5/8 x 12 Gage (41 x 41 x 2.5)	144 (3658)	48 (1212)

**APPROVED****Fixed Equipment Anchorage**

Office of Statewide Health Planning and Development

**OPA-0349**on
January 16, 2009
Anthony R. Pike (916) 440-8470

QTY	SIZE	TAG

QTY	SIZE	TAG